


TARU SPOT Quick Reference

Power On

- Power on Controller
- On Back of Robot
 - Press and Hold Power Button for 3 Seconds then release
 - Ensure Motor Lockout Button is Depressed
- If Equipped, Turn on Persistent Systems Radio to Channel 1 on Both Spot and Controller
- Open Spot App on Controller

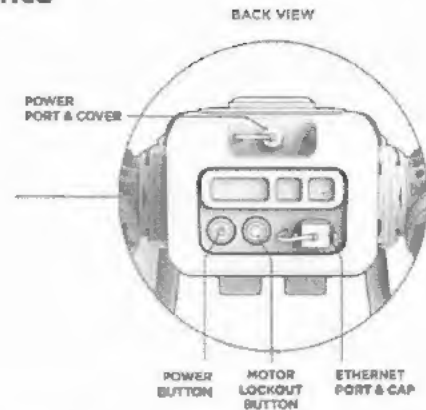

Connect to Spot

- Wait for Fan to Spool Down on Spot Then Select one of the two Spot Connection Options
 - Wi-Fi - Less Operational Distance/ Lower Quality Video
 - Ethernet (Persistent Systems Radio)- Greater Operational Distance/ Image Quality
- Follow Prompts on screen for Cut Motor Function
- Tap Power Button on Screen of Controller to Turn on Motors

Operating Spot

- Verify Motor Lockout Button is Depressed to operate [REDACTED]
- Motor Lockout Button Must Always Be in the OUT position If you are going to touch spot after Startup Procedure (Serious Injury Can Occur)
- Utilize On Screen Buttons or Manual buttons on controller
 - A** Walk/ Standup
 - B** Stand in current Position/Enables Full Body Articulation
 - Y** Stairs Mode
 - ALWAYS Use while ascending or descending stairs
 - While Descending ALWAYS walk Spot Backwards Down Stairs, unless it's an absolute Emergency (Spot is more Likely to Fail and Fall Down Stairs)
 - X** Sit
- EMERGENCY STOP MOTOR FUNCTION--- ONLY FOR ABSOLUTE EMERGENCYS
 - [REDACTED]
 - Spot will completely Shut down including all motors. (Be AWARE of your surroundings Spot WILL fall from where ever it is)
- Crawl- hold on screen Walk/Stairs button to pull up menu to find this setting
 - Leaves Three points of contacts while walking
 - Use for rough or unstable terrain
- Self-Right – Hold on screen Sit/ Stand Button to find this function
- Two on Screen Sliders One for Walking height and one for Speed

Cameras

- Upper left corner of controller screen button used to cycle between on board and payload cameras
 - On Board Cameras
 - Use D-Pad to cycle between Front, Left, Right, and Rear Cameras
 - Payload Camera
 - On Screen button for 360 Cameras
 - On Screen button for PTZ camera
 - On Screen button for Lights
 - On Screen button for Speaker and Microphone
 - Green Snapshot on screen button to take a still image

Shutdown

- Always sit Spot and Engage Motor Lockout button before powering off all devices